

Description

Spoke and solid-disk wheels have a symmetrical design and are therefore suitable for devices in which the wheel is mounted visible from both sides. Bearing capacity is between 10 kg and 80 kg with available diameters ranging from 100 to 380 mm.

Type of bearings

plain bearings, PA-bushing, detachable rapid fastener and special bearings on request

Applications


trolleys, toy trikes, scooters, go-carts etc.; play cars, industrial applications, barbecues, gardening tools, wheelbarrows, concrete mixers



URALAN®


Postfach 1105
D-72521 Münsingen
Fon: +49 (0)7381/9393-0
Fax: +49 (0)7381/9393-50
eMail: info@uralan.de

PS - PROGRAM - page 1

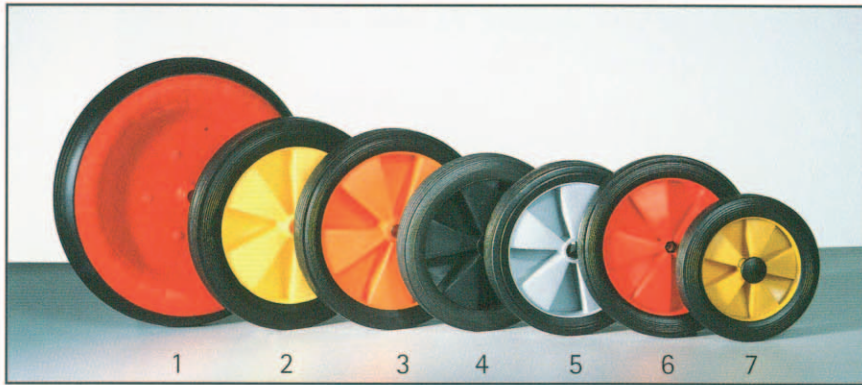

1. Rad 380x80
2. 260P/300
3. 260P/280
4. 190P/250
5. 190P/240
6. 185PN/250
7. 140PN/200


Wheel type C	Tyres x B	Hub dimension A x E				Lbc* kg
140 PN/200	Grooves x 38	Ver 10,2	41xBu8,2	41xBu10,2	41xBu12,2	40
185 PN/250	Grooves x 40	Ver 10,2	41xBu8,2	41xBu10,2	41xBu12,2	40
190 P/240	Grooves x 45	40,5x25,5	41x20,2	40x22,2		70
190 P/250	Grooves x 45	42,5x25,5	45x28	45,2x25,2	54x25,5	70
260 P/280	Grooves x 45	45x20,2	49x25,2	58x16,2	63x25,2	80
260 P/300	Grooves x 45					
Rad 380	Grooves x 80	88x20,2	88x16,2	102x14,2		

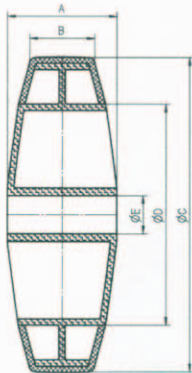

*Load-bearing capacity


Additional hub dimensions and coloration can all be manufactured to customer specifications.

PS - PROGRAM - page 2

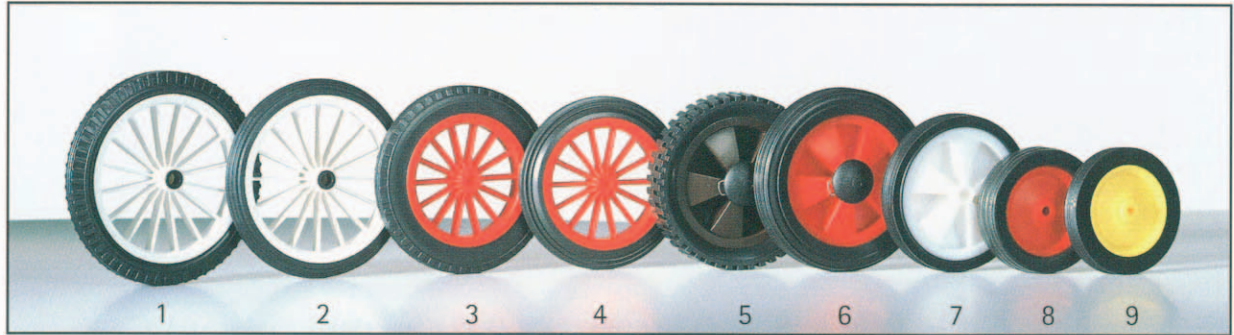

- | | | | | | |
|----|------------|----|------------|----|------------|
| 1. | 135S/180sN | 4. | 110S/140K | 7. | 110P/122Ri |
| 2. | 135S/165K | 5. | 110P/150vQ | 8. | 75/105x30 |
| 3. | 110S/150sN | 6. | 110P/150Ri | 9. | 75/105x18 |

Wheel type C	Tyres x B	Hub dimension A x E				Lbc* kg
75/105	Grooves x 18 Grooves x 30	31x6,2	33xBu8,2	33x10,2	31x13	10
110P/122	Grooves x 18	Ver 8,2	Ver 10,2	32x8,2	32x10,2	30
110P/150	Grooves x 24	35xBu8,2	35xBu10,2	35xBu12,2		
110P/150	Shifted transverse lug x 33					
110S/140	Wedge	Ver 8,2	Ver 10,2	32x8,2	32x10,2	20
110S/150	sN x 20	35xBu8,2	35xBu10,2	35xBu12,2		
135S/165	Wedge	Ver 8,2	Ver 10,2			25
135S/180	sN x 20	35xBu8,2	35xBu10,2	35x12,2		

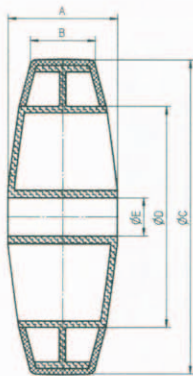

*Load-bearing capacity

Additional hub dimensions and coloration can all be manufactured to customer specifications.