

Description


The wheels in the RAM-94 range are a further development of the RAM-88 range and provide an alternative with reduced material. The wheels are enclosed on both sides. A wheel cover prevents dirt from getting into the area of the hub. Bearing capacity is between 20 kg and 45 kg with available diameters ranging from 130 to 200 mm. A driving wheel with a diameter of 200 mm is also available.

Types of bearings

plain bearings, PA-bushing, ball bearings, plastic ball bearings, roller bearings, and special bearings on request

Applications

lawnmowers, high-pressure cleaners, aspirators, hose reels

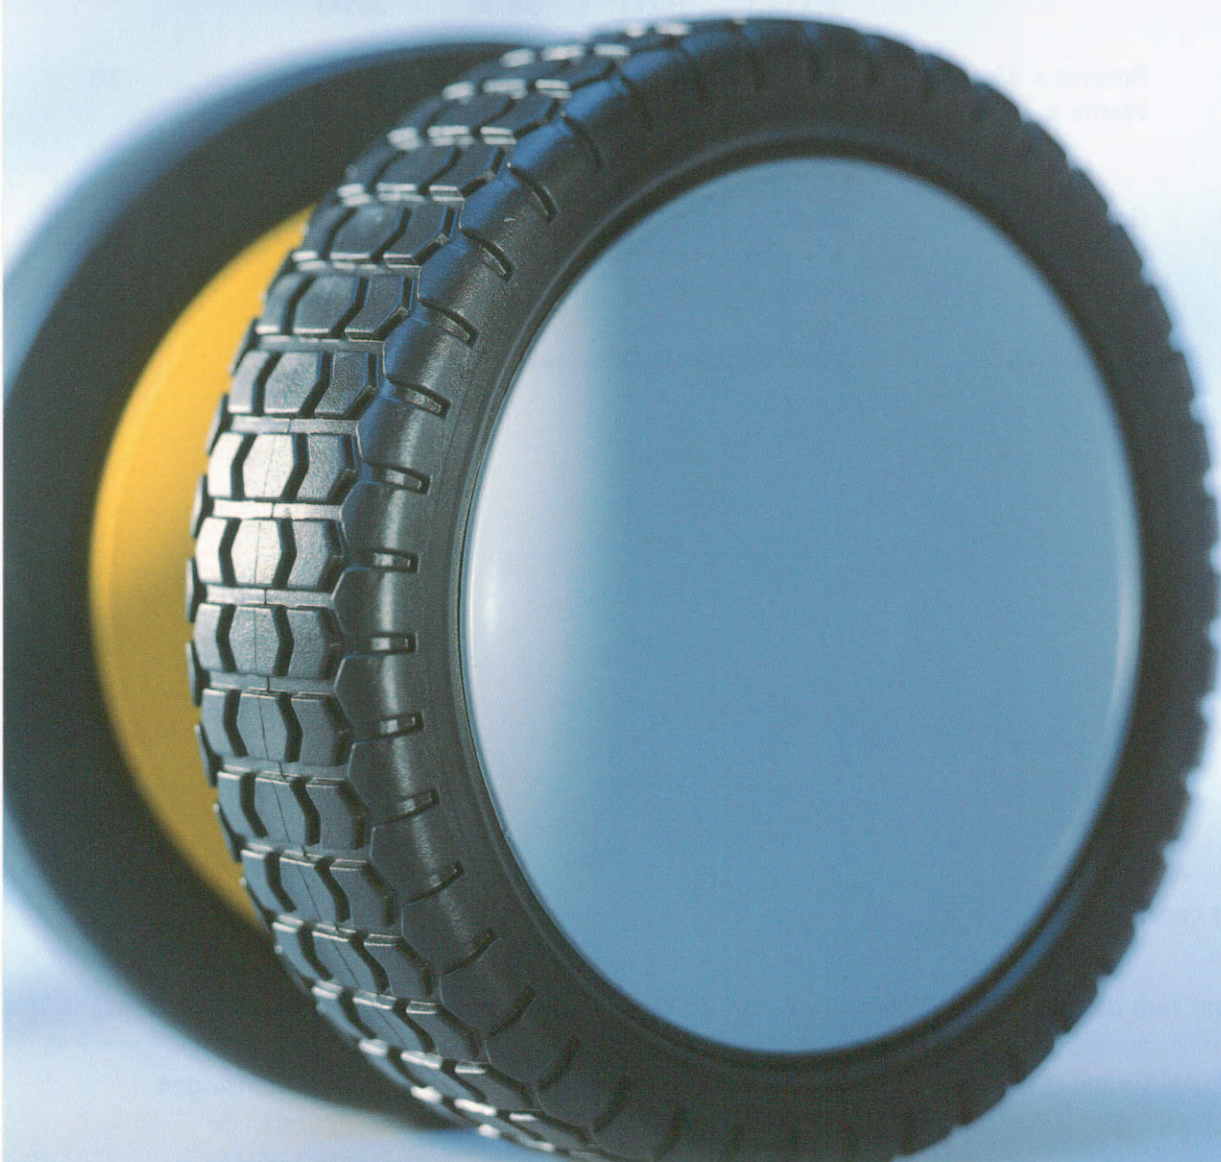


RAM-94-PROGRAM



URALAN®


Postfach 1105
D-72521 Münsingen
Fon: +49 (0)7381/9393-0
Fax: +49 (0)7381/9393-50
eMail: info@uralan.de

RAM - 94 - PROGRAM

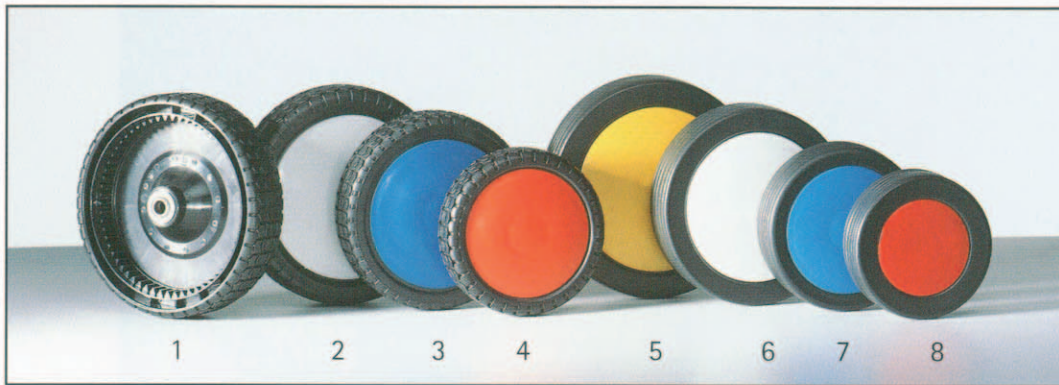

- | | | |
|------------------------|------------------|------------------|
| 1. RAM 200-94 Wa drive | 4. RAM 150-94 Wa | 7. RAM 150-94 Ri |
| 2. RAM 200-94 Wa | 5. RAM 200-94 Ri | 8. RAM 130-94 Ri |
| 3. RAM 180-94 Wa | 6. RAM 180-94 Ri | |

Wheel type C	Tyres x B	Hub dimension A x E				Lbc* kg
RAM 130-94	Grooves x 40	35x8,1	35x12,1	34x12,2		20
RAM 150-94	Grooves x 40	35x8,1	35x12,1	39x12,1	37,5xKl	25
	Waffle x 45	35x8,1	35x12,1	38x12,1		
		39x12,1	35xKl	38xKl	39xKl	
RAM 180-94	Grooves x 45	33x10,2	33x16,2	35x12,2	37xKl	30
	Waffle x 45	35x8,1	35x12,1	38x12,1		
		39x12,1	35xKl	38xKl	39xKl	
RAM 200-94	Grooves x 50	38xKl				35
	Waffle x 53	35x12,2	38x10,2	38x12,2		
		38x20,2	35xKl	38xKl	39xKl	
RAM 200-94 drive	Waffle x 53	42xKl (internal teeth m=2,5 z=62)				45

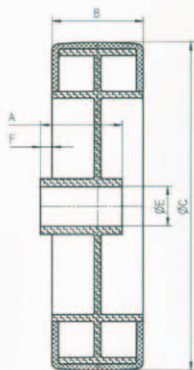

*Load-bearing capacity

Additional hub dimensions and coloration can all be manufactured to customer specifications.