

Description

The conveyor rollers are of particularly stable construction and are designed for large bearing capacities and continuous duty. Bearing capacity is between 80 kg and 100 kg with available diameters ranging from 170 to 260 mm.

Types of bearings

plain bearings, PA-bushing, ball bearings and special bearings on request

Applications

stabilisers, aspirators and cleaning machines, industrial applications, boat trailers, displays, sales shelves and sales trailers


TR-PROGRAM



URALAN®


Postfach 1105
D-72521 Münsingen
Fon: +49 (0)7381/9393-0
Fax: +49 (0)7381/9393-50
eMail: info@uralan.de

TR - PROGRAM

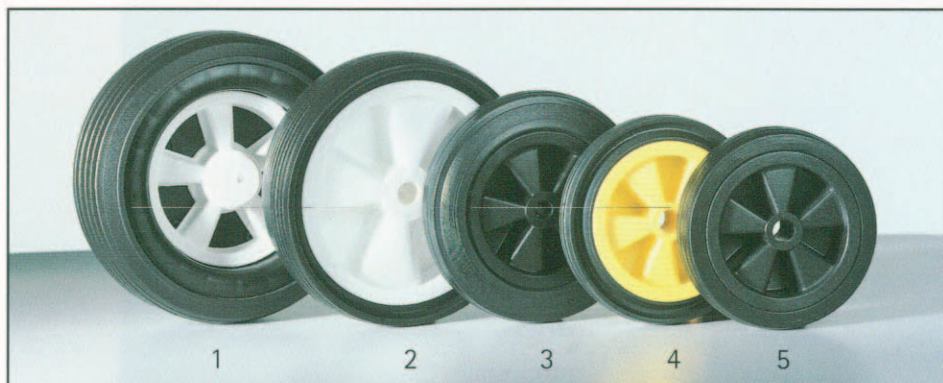

1. TR 260x105
2. TR 200/230x65
3. TR 138/200
4. TR 138/180
5. TR 138/170

Wheel type C	Tyres x B	Hub dimension A x E				Lbc* kg
TR 138/170	Grooves x 46	50x15,2	50x16,2	50x20,2	50x22,2	11
TR 138/180	Grooves x 33					
TR 138/200	Grooves x 50					
TR 200/230	Grooves x 65	49x20,2	49x25,2	67xKI		100
TR 260	Grooves x 105	49x25	49x25,8	66xBu20,5		100

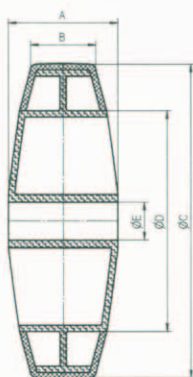

*Load-bearing capacity

Additional hub dimensions and coloration can all be manufactured to customer specifications.